

Meter Dimensions (mm)

DN (mm)	A	B	C	D	E
10, 15, 20	60	180	115	200	76
25, 32	80	197	150	200	96
40, 50	115	232	220	200	102
65, 80	122	239	233	200	102
100, 125	170	287	330	250	132
150	180	297	350	300	172
200	235	352	460	350	207
250	290	407	570	400	242
300	335	452	660	500	292
350	355	467	690	550	292

Dimensions are with ANSI 150 Flanges, with terminal box.
 (for other flange rating consult factory)
 Dimension 'D' is without earthing rings.
 Standard flanges ANSI150 upto DN350.

ORDERING INFORMATION

Sample code explained: DN25-PTFE-SS316L-ANSI 150-CS-SS304-SR1000A-1D-1L-RS4-RMT-2

DN 25	Flow Meter Size DN 10 : 3/8" DN 80 : 3" DN 15 : 1/2" DN 100 : 4" DN 20 : 3/4" DN 125 : 5" DN 25 : 1" DN 150 : 6" DN 32 : 1 1/4" DN 200 : 8" DN 40 : 1 1/2" DN 250 : 10" DN 50 : 2" DN 300 : 12" DN 65 : 2 1/2" DN 350 : 14"	ANSI 150	Flange / End Connection Standards DIN : DIN ANSI 150 : ANSI 150 AS 4087 : AS 4087 Any Other : ZZ	1D	Display Blind : B Indication Display : 1D Indication & Totalization : 2D
PTFE	Liner Material PTFE : PTFE Neoprene : NE Soft Rubber : SR Hard Rubber : HR PFA : PFA Any Other : ZZ	MS/CS	Flange / End Connection Material Mild/Carbon Steel : MS/CS Stainless Steel 304 : SS304 Stainless Steel 316 : SS316 Stainless Steel 316L : SS316L	1L	Logging Normal Logging : 1L Extended Logging : 2L No Logging : 0L
SS316L	Electrode Material SS316 : SS316 SS316L : SS316L Hastelloy B : HAST B Hastelloy C 276 : HAST C 276 Tantalum : TAN Titanium : TIT Any Other : ZZ	SS304	Body Material Mild / Carbon Steel : MS/CS Stainless Steel 304 : SS304 Stainless Steel 316 : SS316 Stainless Steel 316L : SS316L	RS4	Communication Facility No Communication : NA RS 232 : RS2 RS 485 : RS4
	SR1000A	Transmitter Type SROAT 1000A : SR1000A SROAT 1000AP : SR1000AP	RMT	Transmitter Mounting Integral : INT Remote : RMT Remote 2 : Pipe Mounting - RMT P	2
					Power Supply 110 V AC ± 10%, 50 Hz : 1 230 V AC ± 10%, 50 Hz : 2 24 V DC : 3 85-265 V AC, 50 Hz : U Any Other : Z

Due to continuous development specifications are subject to change without prior notice.



EL 54, Electronic Zone,
 J-block, MIDC Bhosari,
 Pune 411026.
 Maharashtra, India.
 Tel: 8484039026 Ext. No. 106
 Mob: +91 77220 34924 / 74200 99054
 mktg@manasmicro.com
 www.manasmicro.com

We are certified with:
 ISO/IEC 17025:2017 | ISO 9001:2015 | ISO 14001:2015 | OHSAS 45001:2018



Fc-FBE-05_1 | EMF-1

WE MEASURE FLOW



MAGMETER
 SROAT 1000

We are certified with
 ISO/IEC 17025:2017 | ISO 9001:2015
 ISO 14001:2015 | OHSAS 45001:2018



ELECTROMAGNETIC FLOW METER SROAT - 1000

INTRODUCTION

The Manas Make electromagnetic flow meter called as SROAT-1000 virtually approaches the ideal flow meter suitable for wide range of liquid flow measurements even with very low conductivities. The meter offers no resistance to flow hence the pressure drop is almost negligible. The measurement being based on Faraday's law of

electromagnetic induction, is independent of viscosity, density, pressure and temperature of flowing medium. The measurement is not affected by solid impurities as long as the min. conductivity of $5\mu\text{s/cm}$ is available. It is a true volumetric flow measurement. We offer various materials of construction for meter lining and electrodes to cover majority of corrosive liquids.

The technique called as "Pulsed DC" is used which offers very high zero stability and accuracy of measurement. The standard current output of 4-20 mA DC is provided which is linearly proportional to volumetric flow rate.

PRINCIPLE OF OPERATION

The method of flow measurement is based on Faraday's law of electromagnetic induction. When a conductor moves within a magnetic field, voltage is induced in it which is proportional to the velocity of conductor.

In this case the conductor is flowing media. The equation is as below.

$$E = B.v.d.$$

where,

- E = Induced voltage [proportional to velocity]
- B = Magnetic flux density
- v = Mean velocity of the media
- d = Distance between the sensing electrodes

For a given size of flow tube and compatible amplifier the flux density 'B' is constant, the distance between the electrodes is constant. Hence, the induced voltage is proportional to the velocity of the flowing media. Thus, the unit can be calibrated in terms of volumetric flow rate by knowing the cross-sectional area of the Tube.

PRINCIPAL ADVANTAGES

- Use of pulsed DC magnetization and auto zero technique offers excellent long term zero stability
- Measurement is independent of velocity profile across the diameter of the pipe-line
- Measurement results are independent of density, viscosity, pressure, temperature, solid - impurities and conductivity variations [above $5\mu\text{s/cm}$]
- No additional pressure drop across the meter which relieves the process designer while sizing his pumping requirements. Simple to install as no special precautions of straight pipe lengths required
- Compatible with virtually all corrosive / non-corrosive liquids
- Protection class offered IP 68 for flow sensor, IP 67 for transmitter
- Reasonably higher ratio of Return on Investment to Investment

APPLICATIONS

This meter is more suitable with those fluids which present difficulties in handling. Fluids such as effluents, slurries, pulps, brines and other highly corrosive liquids, acids and bases, fermenter- wash, molasses etc.


Following industries can find lot of application of this flow measurement technique.

- Effluent Treatment Plants
- Sewage Treatment Plants
- Water Supply Schemes
- Steel and Aluminium
- Sugar Industries and Distilleries
- Pulp and Paper
- Chemical / Pharmaceutical
- Petrochemicals / Fertilizers
- Food and Drugs


FLOW RATE TABLE (Flow rate at v = 1 m/s)

DN	M3/Hr.	LPM	LPS
10	0.282	4.712	0.078
15	0.636	10.602	0.176
20	1.130	18.849	0.314
25	1.767	29.452	0.490
32	2.895	48.254	0.804
40	4.523	75.398	1.256
50	7.068	117.809	1.963
65	11.945	199.098	3.318
80	18.095	301.592	5.026
100	28.274	471.238	7.853
125	44.178	736.310	12.271
150	63.617	1060.287	17.671
200	113.097	1884.955	31.415
250	176.714	2945.243	49.087
300	254.469	4241.150	70.685
350	346.356	5772.608	96.210

ERROR DIAGRAM

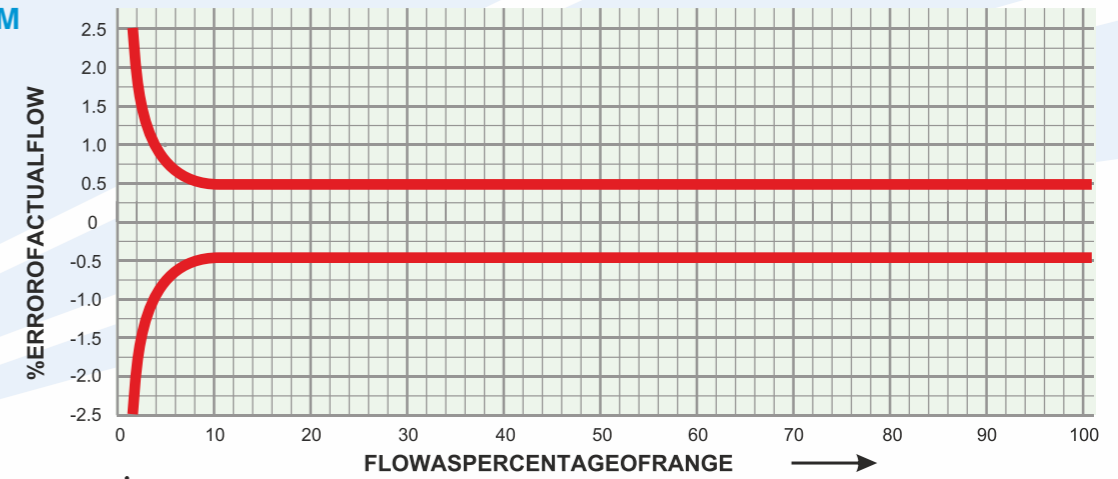

FLOW NOMOGRAPH

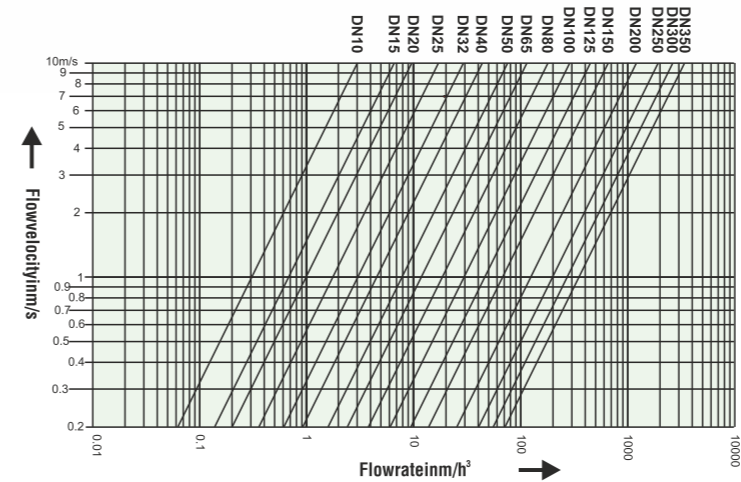

SPECIFICATIONS*

METERING TUBE: SROAT 1000

Meter Size	: DN 10 to DN 350 for higher sizes consult factory
Media Pressure	: Up to DN 80- PN 40 From DN 100 to DN 200 - PN 16 DN 250 to DN 350 - PN 10
Media Temperature	: PFA Liner: 0 - 200°C max. PTFE Liner: 0 - 150°C max. Rubber Liner: 0 - 90°C max.
Ambient Temperature Range	: 0 - 50°C
Materials : Pipe	: SS 304 (non-magnetic)
Electrode	: SS 316/SS316L/Hastelloy C/Ta/Ti
Liner	: PTFE/Neoprene/Soft Rubber/ Hard Rubber/PFA
Flanges	: CS/SS 316/SS 316L/SS 304
Body Material	: Carbon Steel, P.U. painted/ SS 304/SS316
Flange Standard	: ANSI/DIN/BS/SMS/Triclamp
Power Supply to field coils	: Pulsed DC
Ingress Protection	: For Integral : IP 67 For Remote : IP 68

TRANSMITTER SROAT 1000 A

Mounting	: Integral mounted (on request) Remote mounted (standard)
Min. Media Conductivity	: $5\mu\text{S/cm}$ (for lower conductivities consult factory)
Signal Output Additional Option	: 4-20 mA dc isolated in max. 600 ohms Pulsed output with adjustable count rate from 1 count / Hr to 10^5 counts/Hr. (open collector with 100mA/24 V dc capacity)
Local Display	: a) 3 1/2 digit LCD calibrated in % or in engineering units for flow rate indication b) 8-digit LCD non resettable type for totalized quantity
Flow Velocity Range	: 0.1 m/s to 10 m/s
Accuracy	: $\pm 0.5\%$ of reading (at ref. conditions) between 100% to 10% of calibrated range $\pm 0.75\%$ of reading for flow rate between 10% to 5% (Refer accuracy graph)
Ref Conditions	: Power supply nominal Temperature $27^\circ\text{C} \pm 2^\circ\text{C}$
Repeatability	: $\pm 0.2\%$ of reading
Ambient Temperature	: 0 - 50°C
Temperature Drift	: $\pm 0.015\%$ per °C max.
Humidity	: 90% R.H. max. non condensing
Material of Housing	: Al. Die cast
Power Supply	: 230V ac/110V ac, 50Hz/24V dc
Damping	: Adjustable from 5 to 30 secs.
Cable Entries	: 4 no. For Remote Amplifier 2 no For Integral Amplifier PG11/1/2" NPT/1/2" BSP/(Female)
Ingress Protection	: IP-67

ADDITIONAL FEATURES IN SR 1000 A PLUS

Communication Port	: RS 485 (standard) RS 232 (on request)
Data Logging	: Available