

We are certified with

ISO/IEC 17025:2017 | ISO 9001:2015  
ISO 14001:2015 | OHSAS 45001:2018



# ECONOMICAL RANGE OF ELECTROMAGNETIC FLOW METER



## Smart JAL Ec Series SJEC-100

Economical Flow Meter by Manas offers SMART JAL Ec Flow Meter which is an economical flow meter for simpler applications. These meters are compact, lightweight, and are commonly used in Treated Effluent, Sewage water, Wastewater, etc. This type of flow meter also works on Faraday's Law of Electromagnetic Induction.



### Features

- No moving parts
- Economically Priced
- Do not require much upstream and downstream straight Lengths
- Very fast Operation / small response time
- Long life hence cost effective
- Engineered in PP
- Flowmeter does not obstruct flow, so it can be applied to clean, sanitary, dirty, corrosive liquids
- Fully Vibration proof

### Technical Specifications:

Meter Size	: DN10 to DN50
End Connections	: 3/8" BSP (M) to 2" BSP (M) as per size
Dimensions	: 189 mm (L) x 109 mm (W) x 157 mm (H) for DN10 –DN40 193 mm (L) x 102 mm (W) x 178 mm (H) for DN50
Material of Construction	
a) Sensor	: PP
b) Measuring Electrodes	: SS316
Protection Class	: IP66

Operating Ambient Temperature	: 0 – 50° C
Media Pressure	: 10 Bar From DN10 upto DN50
Mounting	: Integral
Enclosure	: ABS / PP
Cable Glands	: PG7 (1. Power & Pulse output 2. COMM PORT or 4-20mA)
Cable Entries	: 2
Media Conductivity	: $\sigma \geq 20\mu S / cm$
Empty Tube Detection	: Provided
Accuracy	: $\pm 1\%$ of Actual Flow Rate between 100 % to 10 % Flow Rate
Display	: 16X2 rows LCD Display For Instantaneous Flow Rate, Totaliser, Engineering Units, Fault messages
Output	: Pulse output PNP/NPN Pulse output is proportional to flow rate
Note	: Pulse o/p stopped if flow tube is empty
Optional Outputs	: 4-20mA dc, isolated (with max. 600Q load) Proportional to instantaneous flow rate Or Communication port (RS485 (Std) Or RS232 (Optional))
Output Pulse Selection	: 1 pulse / 0.1 liter or 1pulse / 1 liter or 1 pulse / 10 liter or 1pulse / 100 liter
PC Communication	: Protocol - MODBUS RTU Comport - RS232 (optional) / RS485 (Std)
Power Supply	: 12V dc / 24V dc, $\pm 10\%$ for integral transmitter 230 Vac Adaptor

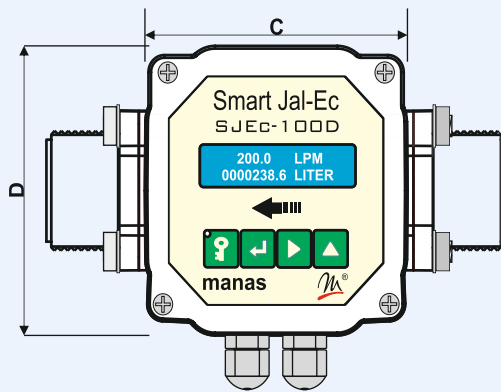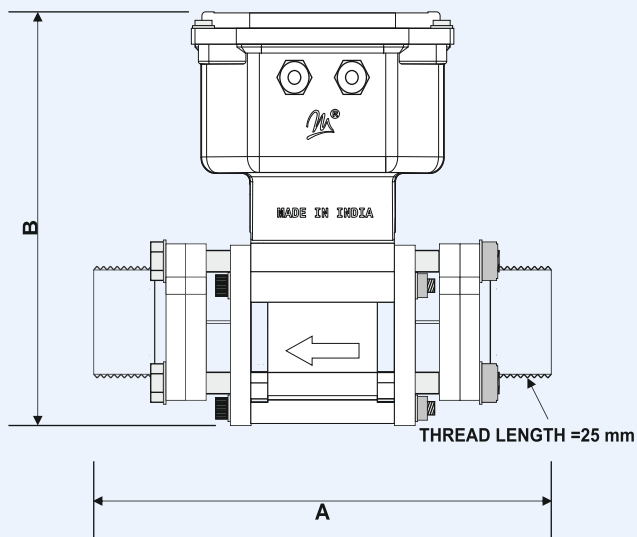

### Meter Dimensions (mm)

DN (mm)	A	B	C	D
10	193	157	108	109
15	193	157	108	109
20	193	157	108	109
25	193	157	108	109
32	189	157	108	109
40	193	157	108	109
50	193	177	100	102

All dimensions are in mm

End Connection Thread is as per DN size BSP(M)

## ORDERING INFORMATION

Sample code explained: DN 40 - SS316L - 2" BSP - 2D - P - RS4 - INT - 2

<b>DN 40</b>	<b>Flow Meter Size</b>	<b>2" BSP</b>	<b>End Connection</b>	<b>RS4</b>	<b>Communication Port OR 4-20mA</b>
	DN 10 : 3/8"		3/8" BSP Threaded (M) : 3/8" BSP		RS232 : RS2
	DN 15 : 1/2"		1/2" BSP Threaded (M) : 1/2" BSP		RS485 : Rs4
	DN 20 : 3/4"		3/4" BSP Threaded (M) : 3/4" BSP		OR
	DN 25 : 1"		1" BSP Threaded (M) : 1" BSP		4-20 mA : C
	DN 32 : 1 1/4"		1 1/4" BSP Threaded (M): 1 1/4" BSP		
	DN 40 : 1 1/2"		1 1/2" BSP Threaded (M): 1 1/2" BSP		
	DN 50 : 2"		2" BSP Threaded (M) : 2" BSP		
<b>SS316</b>	<b>Electrode Material</b>	<b>2D</b>	<b>Transmitter Type</b>	<b>INT</b>	<b>Transmitter Mounting</b>
	SS316 : SS316		Instantaneous : 2D		Integral : INT
	Hastelloy C : HAST C		Flow Rate & Total		
		<b>P</b>	<b>Output Type</b>	<b>2</b>	<b>Power Supply</b>
			P : Pulse Output		230 Vac : 2
					Adaptor
					24 V DC : 3
					12 V DC : 4

Due to continuous development specifications are subject to change without prior notice.



### Manas Microsystems Pvt. Ltd.

EL 54, Electronic Zone,  
J-block, MIDC Bhosari,  
Pune 411026.  
Maharashtra, India.

Tel: 020 27127044/45  
Mob: +91 8484039026  
mktg@manasmicro.com  
www.manasmicro.com

**We are certified with:**

ISO/IEC 17025:2017 | ISO 9001:2015 | ISO 14001:2015 | OHSAS 45001:2018

